



laundry equipment

Professional Washer Extractors

P 6, P 7



FEATURES WASHER EXTRACTORS

- Large capacity 6/7 kgStainless steel cabinet (AISI 304)Stainless steel drum and tub

- Stainless steel drum and tub
 Easy to use timer, economy programmes, mop programmes
 Short washing cycle
 Large drain valve (Ø50 mm)
 Soap hopper on the front
 Frequency controlled motor
 PowerWash® perforated lifting ribs: more mechanical action, lower water consumption
- SuperEco washing programmes
 significantly reduces water and electricity consumption

OPTIONS WASHER EXTRACTORS

- External coin meter
- Drain pump








7)
Ž	į
1811	į
7)
7	t
20	7
_	

ТҮРЕ		P6	P7		
CAPACITY	kg/lb	6/15	7,5/18		
DRUM DIAMETER	mm	Ø530	Ø530		
DRUM VOLUME	I	60	73		
MOTOR					
Frequency controlled		standard	standard		
EXTRACTION SPEED	rpm	1150	1100		
G-FACTOR		390	360		
ELECTRICAL		1x220-240V 50/60Hz			
CONNECTION		3x220-240V 50/60Hz			
		3x380-415V-	3x380-415V+N 50/60Hz		
		1x380-440V 50/60Hz			
ELECTRICAL HEATING	kW	Standard 6kW			
		Optional 3 or 9kW			
WATER CONNECTION		<u>'</u>			
Warm water max. 70 °C		3/4"			
Cold water connection		3/4"			
DRAIN					
Drain valve		standard			
Pump		available			
DIMENSIONS					
H×W×D	mm	940×685×645	940×685×685		
TRANSPORT DATA					
Gross weight					
Foil packing	kg	165	175		
Net weight	kg	160	165		
Volume (packed)					
Foil packing	m ³	0,54	0,59		
Foil packing					
H×W×D	mm	1060×710×740	1060×710×740		
WATER CONSUMPTION					
Cold and hot water per cycle*		40+8	48+12		
	1 604 56	norm, The data concerning dimensions of machines include	de all extended parts		

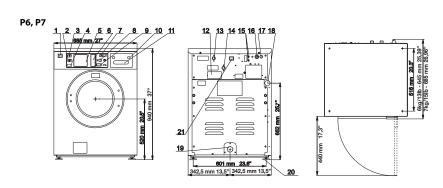

- 1. Electrical switch
- 2. Function push button
- 3. START push button
- 4. Door open push button
- 5. Card of programs
- **6.** LED of cycle indicators
- 7. LED of program display
- 8. LED of remaining time display
- 9. LED of option temperature display
- 10. Soap hopper
- 11. Drum venting
- 12. Serial plate
- 13. Connection of cold water
- 14. Connection of hot water
- **15.** Fuses
- **16.** Electrical connection of the machine
- **17.** Plug
- 18. Hose orif ice of the version with drain
- 19. Drain of the version with drain valve
- 20. Adjustable leg
- 21. "Program/run" mode push button

