

**Xtreme**  
in innovation

**primus**

*laundry equipment*

## TUMBLE DRYERS

**DX55, DX77, DX90**



### FEATURES

- Full OPL microprocessor
- Gas, Steam heating ,  
Electrical heating (DX55)
- Large door opening  
for easy loading  
and unloading (Ø68cm)
- Galvanized drum
- Radial airflow
- Standard reversing drum
- Self-cleaning lint screen
- Preheating of intake air

### OPTIONS

- Stainless steel drum
- Stainless steel front panel
- Residual moisture control Sensodry+®:
  - lower energy and utility costs
  - lower linen replacement costs
- SafeTech™ Fire Suppression System



LOW ENERGY  
CONSUMPTION



LARGE DOOR  
OPENING




FAST DRYING  
CYCLES

**senso.dry+**

**SafeTech™**

TYPE		DX 55 EL	DX 55 GAS	DX 55 STEAM (HIGH PRESSURE)	DX 77 GAS	DX 77 STEAM (HIGH PRESSURE)	DX 90 GAS	DX 90 STEAM (HIGH PRESSURE)
CAPACITY	kg	55			77		90	
DIMENSIONS DRUM								
Drum volume	l	1021			1408		1656	
Drum diameter	mm	Ø1118			Ø1289		Ø1289	
AIR FLOW	l/s	755			1156		1156	
HEATING	kW	60	79	119	116	190	125	190
MOTOR								
Drum	kW	0.560			0.560		0.560	
Fan	kW	0.746			2.238		2.238	
CONNECTION								
Electrical	AC/Hz	3x200-240V 50/60Hz, 3x380-415V 50 Hz, 3x380-415/440V 60Hz			Others on request		Others on request	
Gas inlet	inch	-	1	-	1	-	1	-
Steam inlet	inch	-	-	3/4	-	3/4	-	3/4
Air outlet	mm	254			305		305	
	inch	10			12		12	
DIMENSIONS								
HxWxD unpacked	mm	2177x1178x1725			2388x1349x1749		2388x1349x1939	
HxWxD packed	mm	2286x1232x1829			2519x1473x1892		2515x1413x2019	
WEIGHT								
Net	kg	578	578	624	714	760	790	820
Gross	kg	607	607	656	756	806	855	855

The data concerning dimensions of machines include all extended parts

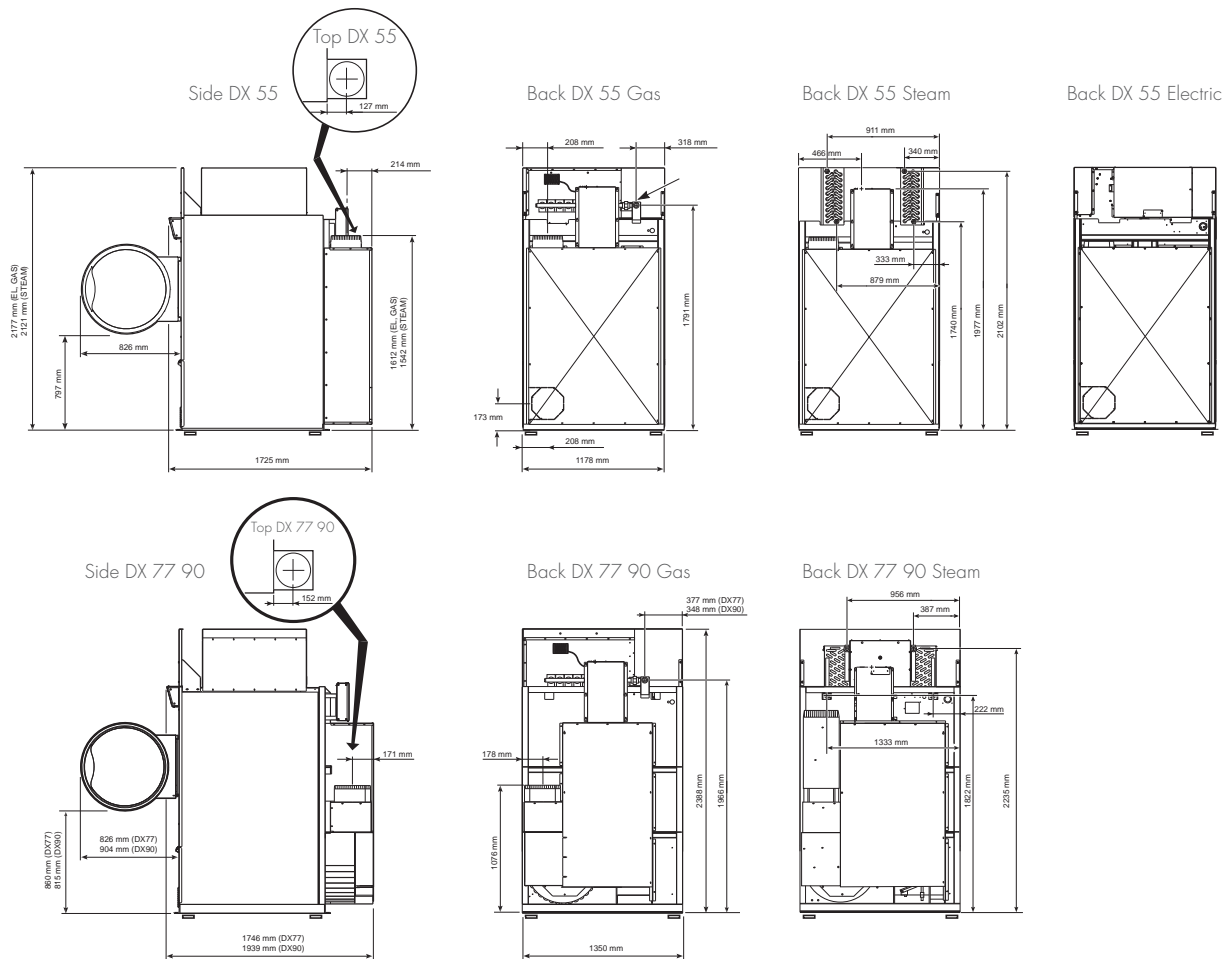

Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

[www.primuslaundry.com](http://www.primuslaundry.com)

